


**BLZP 5.00HC/06/180F AU BK BX PRT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

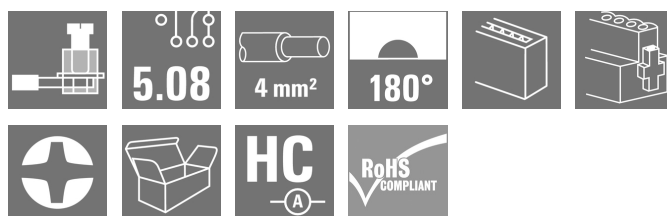**Product image**

Similar to illustration

**General ordering data**

|              |                                                                                                                                    |
|--------------|------------------------------------------------------------------------------------------------------------------------------------|
| Version      | PCB plug-in connector, female plug, 5.00 mm, Number of poles: 6, 180°, Clamping yoke connection, Clamping range, max. : 4 mm², Box |
| Order No.    | <a href="#">1407830000</a>                                                                                                         |
| Type         | BLZP 5.00HC/06/180F AU BK BX PRT                                                                                                   |
| GTIN (EAN)   | 4050118208481                                                                                                                      |
| Qty.         | 42 pc(s).                                                                                                                          |
| Product data | IEC: 400 V / 23 A / 0.2 - 4 mm²<br>UL: 300 V / 20 A / AWG 26 - AWG 12                                                              |
| Packaging    | Box                                                                                                                                |

Creation date November 7, 2024 10:23:11 AM CET

Catalogue status 26.10.2024 / We reserve the right to make technical changes.

**BLZP 5.00HC/06/180F AU BK BX PRT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 20 mm    | Depth (inches)  | 0.787 inch |
| Height     | 16 mm    | Height (inches) | 0.63 inch  |
| Width      | 40.28 mm | Width (inches)  | 1.586 inch |
| Net weight | 10.12 g  |                 |            |

**System Parameters**

|                                              |                                        |  |                   |
|----------------------------------------------|----------------------------------------|--|-------------------|
| Product family                               | OMNIMATE Signal - series BL/SL 5.08    |  |                   |
| Type of connection                           | Field connection                       |  |                   |
| Wire connection method                       | Clamping yoke connection               |  |                   |
| Pitch in mm (P)                              | 5 mm                                   |  |                   |
| Pitch in inches (P)                          | 0.2 "                                  |  |                   |
| Conductor outlet direction                   | 180°                                   |  |                   |
| Number of poles                              | 6                                      |  |                   |
| L1 in mm                                     | 25.4 mm                                |  |                   |
| L1 in inches                                 | 1 "                                    |  |                   |
| Number of rows                               | 1                                      |  |                   |
| Pin series quantity                          | 1                                      |  |                   |
| Rated cross-section                          | 4 mm <sup>2</sup>                      |  |                   |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch                 |  |                   |
| Touch-safe protection acc. to DIN VDE 0470   | IP20 plugged/ IP10 unplugged           |  |                   |
| Protection degree                            | IP20                                   |  |                   |
| Volume resistance                            | ≤5 mΩ                                  |  |                   |
| Can be coded                                 | Yes                                    |  |                   |
| Stripping length                             | 7 mm                                   |  |                   |
| Clamping screw                               | M 2.5                                  |  |                   |
| Screwdriver blade                            | 0.6 x 3.5, PH 1, PZ 1                  |  |                   |
| Screwdriver blade standard                   | DIN 5264, ISO 8764/2-PH, ISO 8764/2-PZ |  |                   |
| Plugging cycles                              | 25                                     |  |                   |
| Plugging force/pole, max.                    | 10 N                                   |  |                   |
| Pulling force/pole, max.                     | 9 N                                    |  |                   |
| Tightening torque                            | Torque type                            |  | Wire connection   |
|                                              | Usage information                      |  | Tightening torque |
|                                              |                                        |  | min. 0.4 Nm       |
|                                              |                                        |  | max. 0.5 Nm       |
| Tightening torque                            | Torque type                            |  | Screw flange      |
|                                              | Usage information                      |  | Tightening torque |
|                                              |                                        |  | min. 0.2 Nm       |
|                                              |                                        |  | max. 0.25 Nm      |

**Material data**

|                                       |             |                                       |                           |
|---------------------------------------|-------------|---------------------------------------|---------------------------|
| Insulating material                   | PBT         | Colour                                | black                     |
| Colour chart (similar)                | RAL 9011    | Insulating material group             | IIIa                      |
| Comparative Tracking Index (CTI)      | ≥ 200       | Insulation strength                   | ≥ 10 <sup>8</sup> Ω       |
| UL 94 flammability rating             | V-0         | Contact material                      | Cu-alloy                  |
| Contact surface                       | Gold-plated | Layer structure of plug contact       | 2...3 µm Ni / ≥ 1.5 µm Au |
| Storage temperature, min.             | -40 °C      | Storage temperature, max.             | 70 °C                     |
| Operating temperature, min.           | -50 °C      | Operating temperature, max.           | 100 °C                    |
| Temperature range, installation, min. | -25 °C      | Temperature range, installation, max. | 100 °C                    |

**Conductors suitable for connection**

|                      |                      |
|----------------------|----------------------|
| Clamping range, min. | 0.13 mm <sup>2</sup> |
| Clamping range, max. | 4 mm <sup>2</sup>    |

Creation date November 7, 2024 10:23:11 AM CET

**BLZP 5.00HC/06/180F AU BK BX PRT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**

|                                                                     |                                        |                              |                             |       |
|---------------------------------------------------------------------|----------------------------------------|------------------------------|-----------------------------|-------|
| Solid, min. H05(07) V-U                                             | 0.2 mm <sup>2</sup>                    |                              |                             |       |
| Solid, max. H05(07) V-U                                             | 4 mm <sup>2</sup>                      |                              |                             |       |
| Stranded, min. H07V-R                                               | 2 mm <sup>2</sup>                      |                              |                             |       |
| Stranded, max. H07V-R                                               | 4 mm <sup>2</sup>                      |                              |                             |       |
| Flexible, min. H05(07) V-K                                          | 0.2 mm <sup>2</sup>                    |                              |                             |       |
| Flexible, max. H05(07) V-K                                          | 4 mm <sup>2</sup>                      |                              |                             |       |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.2 mm <sup>2</sup> min. |                                        |                              |                             |       |
| w. plastic collar ferrule, DIN 46228 pt 4, 2.5 mm <sup>2</sup> max. |                                        |                              |                             |       |
| Plug gauge in accordance with EN 60999 a x b; ø                     | 2.8 mm x 2.4 mm                        |                              |                             |       |
| Clampable conductor                                                 | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                                                                     |                                        | nominal                      | 0.5 mm <sup>2</sup>         |       |
|                                                                     | wire end ferrule                       | Stripping length             | nominal                     | 6 mm  |
|                                                                     |                                        | Recommended wire-end ferrule | <a href="#">H0.5/6</a>      |       |
|                                                                     |                                        | Stripping length             | nominal                     | 8 mm  |
|                                                                     |                                        | Recommended wire-end ferrule | <a href="#">H0.5/12 OR</a>  |       |
|                                                                     | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                                                                     |                                        | nominal                      | 1 mm <sup>2</sup>           |       |
|                                                                     | wire end ferrule                       | Stripping length             | nominal                     | 6 mm  |
|                                                                     |                                        | Recommended wire-end ferrule | <a href="#">H1.0/6</a>      |       |
|                                                                     | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                                                                     |                                        | nominal                      | 1.5 mm <sup>2</sup>         |       |
|                                                                     | wire end ferrule                       | Stripping length             | nominal                     | 7 mm  |
|                                                                     |                                        | Recommended wire-end ferrule | <a href="#">H1.5/7</a>      |       |
|                                                                     | Cross-section for conductor connection | Type                         | fine-wired                  |       |
|                                                                     |                                        | nominal                      | 2.5 mm <sup>2</sup>         |       |
|                                                                     | wire end ferrule                       | Stripping length             | nominal                     | 7 mm  |
|                                                                     |                                        | Recommended wire-end ferrule | <a href="#">H2.5/7</a>      |       |
|                                                                     |                                        | Stripping length             | nominal                     | 10 mm |
|                                                                     |                                        | Recommended wire-end ferrule | <a href="#">H2.5/15D BL</a> |       |

Reference text The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage.

**Rated data acc. to IEC**

|                                                                           |                        |                                                                       |                   |
|---------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------|-------------------|
| tested acc. to standard                                                   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 23 A              |
| Rated current, max. number of poles (Tu=20°C)                             | 18 A                   | Rated current, min. number of poles (Tu=40°C)                         | 21 A              |
| Rated current, max. number of poles (Tu=40°C)                             | 16 A                   | Rated voltage for surge voltage class / pollution degree II/2         | 400 V             |
| Rated voltage for surge voltage class / pollution degree III/2            | 320 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 250 V             |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 4,000 V                | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 4 kV              |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 4 kV                   | Short-time withstand current resistance                               | 3 x 1s with 120 A |

**BLZP 5.00HC/06/180F AU BK BX PRT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Rated data acc. to CSA**

|                                   |        |
|-----------------------------------|--------|
| Rated voltage (Use group B / CSA) | 300 V  |
| Rated voltage (Use group D / CSA) | 300 V  |
| Rated current (Use group D / CSA) | 20 A   |
| Wire cross-section, AWG, max.     | AWG 12 |

|                                   |        |
|-----------------------------------|--------|
| Rated voltage (Use group C / CSA) | 50 V   |
| Rated current (Use group B / CSA) | 20 A   |
| Wire cross-section, AWG, min.     | AWG 30 |

**Rated data acc. to UL 1059**

Institute (cURus)



Certificate No. (cURus)

E60693

|                                       |                                                                        |
|---------------------------------------|------------------------------------------------------------------------|
| Rated voltage (Use group B / UL 1059) | 300 V                                                                  |
| Rated current (Use group B / UL 1059) | 20 A                                                                   |
| Wire cross-section, AWG, min.         | AWG 26                                                                 |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate. |

|                                       |        |
|---------------------------------------|--------|
| Rated voltage (Use group D / UL 1059) | 300 V  |
| Rated current (Use group D / UL 1059) | 10 A   |
| Wire cross-section, AWG, max.         | AWG 12 |

**Packing**

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 347 mm |
| VPE width | 134 mm | VPE height | 31 mm  |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002638    | ETIM 7.0    | EC002638    |
| ETIM 8.0    | EC002638    | ETIM 9.0    | EC002638    |
| ECLASS 9.0  | 27-44-03-09 | ECLASS 9.1  | 27-44-03-09 |
| ECLASS 10.0 | 27-44-03-09 | ECLASS 11.0 | 27-46-02-02 |
| ECLASS 12.0 | 27-46-02-02 | ECLASS 13.0 | 27-46-02-02 |
| ECLASS 14.0 | 27-46-02-02 |             |             |

**Environmental Product Compliance**

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

**BLZP 5.00HC/06/180F AU BK BX PRT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Important note**

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Notes          | <ul style="list-style-type: none"> <li>• Additional variants on request</li> <li>• Gold-plated contact surfaces on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• Wire end ferrule without plastic collar to DIN 46228/1</li> <li>• Wire end ferrule with plastic collar to DIN 46228/4</li> <li>• P on drawing = pitch</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• In accordance with IEC 61984, OMNIMATE-connectors are connectors without breaking capacity (COC). During designated use, connectors are not allowed to be engaged or disengaged when live or under load</li> <li>• Long term storage of the product with average temperature of 50 °C and maximum humidity 70%, 36 months</li> </ul> |

**Approvals**

Approvals



|                         |            |
|-------------------------|------------|
| ROHS                    | Conform    |
| UL File Number Search   | UL Website |
| Certificate No. (cURus) | E60693     |

**Downloads**

|                             |                                                                                                                                                                                |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Change Notification | <a href="#">20220106 BLT and BLZP in pitch 5.0x – Addition of a screw locking</a><br><a href="#">20220106 BLT und BLZP im Raster 5.0x – Ergänzung einer Schraubensicherung</a> |
| Catalogues                  | <a href="#">Catalogues in PDF-format</a>                                                                                                                                       |
| Brochures                   | <a href="#">FL DRIVES EN</a><br><a href="#">FL DRIVES DE</a>                                                                                                                   |


## BLZP 5.00HC/06/180F AU BK BX PRT

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

# Drawings

## Dimensional drawing

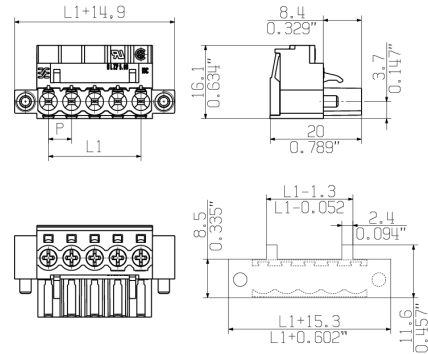

MIN. FRONT PLATE CUT-OUT

## Graph

