




TE Internal #: 5750725-1

DIN Connectors, Mini DIN, Wire-to-Board, 6 Position, Fully Loaded, Polarization Mating Alignment Type, PCB Mount Retention, .26 in [6.5 mm] Centerline

[View on TE.com >](#)

Connectors > Circular Connectors > DIN Connectors

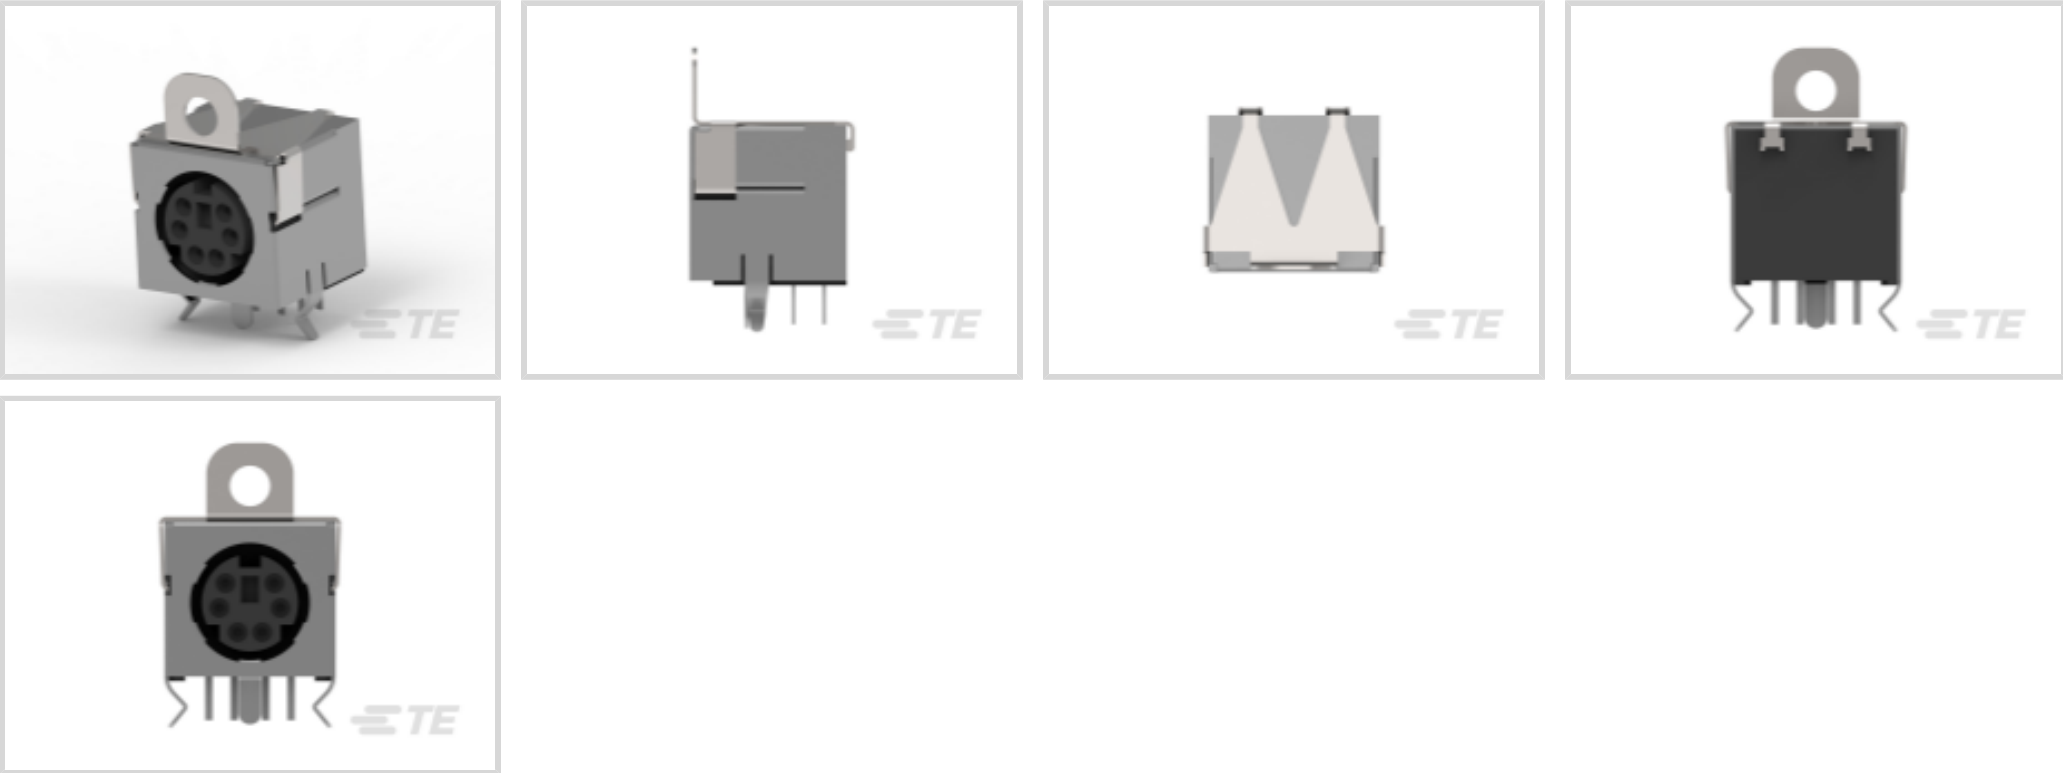

Circular DIN Connector Type: **Mini DIN**

Connector System: **Wire-to-Board**

Number of Positions: **6**

Connector Contact Load Condition: **Fully Loaded**

Mating Alignment Type: **Polarization**

Features

Product Type Features

Circular DIN Connector Type	Mini DIN
Connector System	Wire-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

PCB Mount Orientation	Right Angle
Number of Positions	6
Connector Contact Load Condition	Fully Loaded

Electrical Characteristics

Operating Voltage	30 VAC
-------------------	--------

Body Features

Panel Ground Feature Type	Flange
Shield Plating Finish	Bright
Shield Plating Material	Pre-Tin
Shield Material	Copper Alloy



Primary Product Color	Gray
-----------------------	------

Contact Features

PCB Contact Termination Area Plating Material Thickness	3.05 µm, 4.02 µm[120 µin][170 µin]
Contact Layout	Staggered
Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Tuning Fork
Contact Underplating Material	Nickel
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	.5 A

Termination Features

Termination Post & Tail Length	3.18 mm[.125 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

PCB Mount Alignment Type	Hold-Down
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	With
Panel Mount Feature Type	Screw Nut
Mating Alignment Type	Polarization
PCB Mount Retention	With
PCB Mount Retention Type	Kinked Legs
Connector Mounting Type	Board Mount

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	6.5 mm[.26 in]

Dimensions

Connector Height	19.51 mm[.77 in]
PCB Thickness (Recommended)	2.68 mm[.11 in]



Product Width	14.86 mm[.58 in]
Product Length	13.77 mm[.54 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Shielded	Yes
Circuit Application	Signal

Industry Standards

Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	35
Packaging Method	Box & Tube, Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on



requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 5212045-1
6 CIRC DIN RCPT GRND SHLD


Customers Also Bought



TE Part #2007804-2
IMP100S,H,V3P16C,UG,OEWS39,4,9



TE Part #2170191-1
SFP+ Enhanced 1x4 , W/ Low Heatsink




TE Part #2185213-7
ASSY, STG TL KIT, SFP+ENHANCED




TE Part #143043-000
55A1823-22-6/9-9CS2275



TE Part #9-1617539-8
HS1-5B=HS RELAY

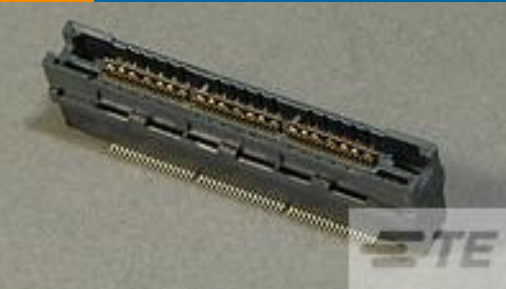

TE Part #5767146-3
TAPE AND REEL PACAKED MICTOR R

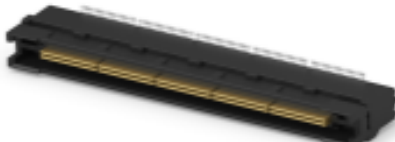

TE Part #5767146-5
TAPE AND REEL PACKAGED MICTOR



TE Part #YDIV40E21-11SDC009
RECP ASSY



TE Part #YDIV40E11-05SCC009
RECP ASSY

Documents

Product Drawings
Mini DIN, 6 pos, R/A, Shield
English



CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5750725-1_O_c-5750725-1-o.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5750725-1_O_c-5750725-1-o.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5750725-1_O_c-5750725-1-o.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English